

# Data sheet

## CONNECT PELLET EDGE




### Technical data


Heating power range	[kW]	2,5 - 8
Nominal heat output	[kW]	8
Room heating capacity (depending on house insulation)	[m <sup>3</sup> ]	50 - 220
Fuel consumption	[kg/h]	0,6 - 1,9
Pellet container capacity E26*	[l/kg]	40/-26
Pellet container capacity E40*	[l/kg]	61/-40
Electric supply	[V]/[Hz]	230/50
Average electrical input	[W]	~20
Fuse	[A]	2,5 AT
Efficiency	[%]	>90
Energy efficiency class		A+
Chimney draft requirement	[Pa]	3

\*The capacity in kg may deviate due to different pellet bulk densities.

### Characteristics




Optional



Balanced flue



Touch display



Tipping grate  
ash removal



Energy  
efficiency



Dynamic Air  
Regulation



Quiet

### Accessories



RIKA FIRENET




RIKA VOICE



Room sensor

## Chimney connection

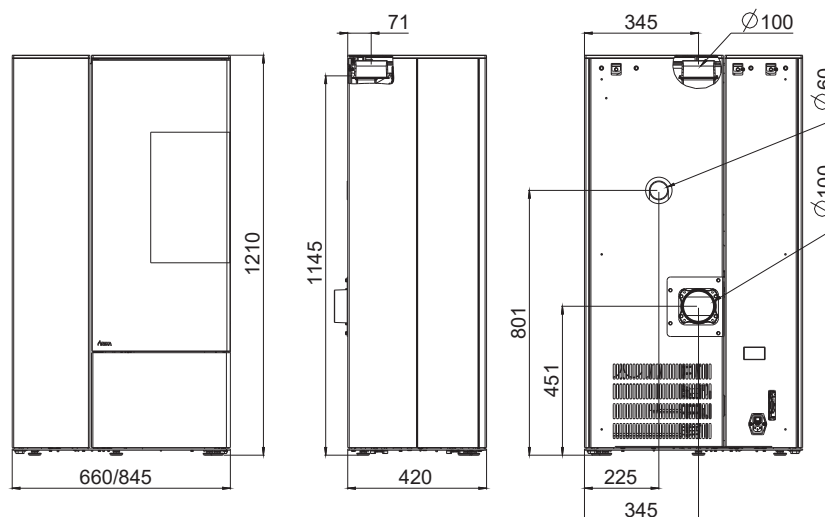

### Dimensions

Height	[mm]	1210
Width E26/E40	[mm]	660/845
Depth	[mm]	420

### Weight

Weight E26/E40	[kg]	168/183
----------------	------	---------

### Flue pipe connection

Flue Pipe Outlet	[mm]	100
Rear Connection Height	[mm]	451
Rear Connection - side Distance	[mm]	345
Top connection Height	[mm]	1145
Top connection - Distance to rear wall	[mm]	71
Top connection - side Distance	[mm]	345

### Fresh air connection

Diameter	[mm]	60
Connection height	[mm]	801
Side distance	[mm]	225

## Safety distances

### Note

1. To non-combustible objects  
a > 40 cm b > 7 cm
2. To combustible objects and reinforced concrete load-bearing walls  
a > 80 cm b > 7 cm

