

DOMO BACK




Technical data

Heating power range	[kW]	3 - 10
Nominal heat output	[kW]	10
MultiAir-Output*	[kW]	0,5 - 3,7
MultiAir-Air volume*	[m ³ /h]	55 - 200
Room heating capacity (depending on house insulation)	[m ³]	70-260
Fuel consumption	[kg/h]	0,8-2,3
Pellet container capacity**	[l/kg]	56/~36
Electric supply	[V]/[Hz]	230/50
Average electrical input	[W]	20
Fuse	[A]	2,5
Efficiency	[%]	91
Energy efficiency class		A+
Energy efficiency index		122,3
Chimney draft requirement	[Pa]	3


*With a two meter MultiAir line in combination with RIKA design outlet, values may differ in practice.

**The capacity in kg may deviate due to different pellet bulk densities.

Characteristics



Tipping grate
ash removal



Balanced flue



Touch Display



USB



Quiet



Dynamic Air
Regulation



Energy
efficiency

Accessories



RIKA firenet



RIKA Voice




MultiAir



Room sensor

Chimney connection

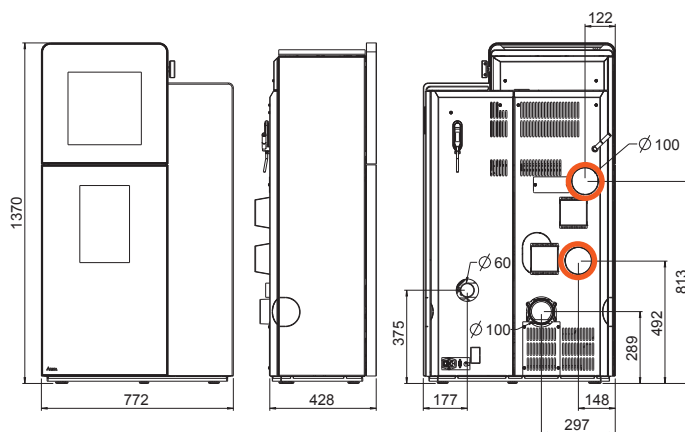

Weight

Weight without shell	[kg]	~215
Weight with stones	[kg]	~255

Dimensions

Height	[mm]	1370
Width	[mm]	772
Corpus depth	[mm]	430

Flue pipe connection

Ø Flue pipe outlet	[mm]	100
Top connection Height	[mm]	
Original angle pipe total depth	[mm]	
Original angle pipe distance to rear wall	[mm]	
Depth from rear wall to middle of flue pipe	[mm]	
Top connection - side Distance	[mm]	
Rear connection height	[mm]	289
Rear connection side distance	[mm]	297

Fresh air connection

Ø Diameter	[mm]	60
Connection height	[mm]	375
Side distance	[mm]	177

Convection air connection

Ø Diameter	[mm]	100/100
Connection height	[mm]	813/492
Side distance	[mm]	122/148

Oven

Height	[mm]	300
Width	[mm]	330
Depth	[mm]	360

Safety distances

Note

- To non-combustible objects
a > 40 cm b > 10 cm
- To combustible objects and reinforced concrete load-bearing walls
a > 80 cm b > 10 cm

